


IGNITION COIL RESISTANCE - 2.4L

Engine	Coil Manufacture	Primary Resistance at 21°C-27°C (70°F-80°F)	Secondary Resistance at 21°C-27°C (70°F-80°F)
2.4L	Toyodenso or Diamond	0.51 to 0.61 Ohms	11,500 to 13,500 Ohms

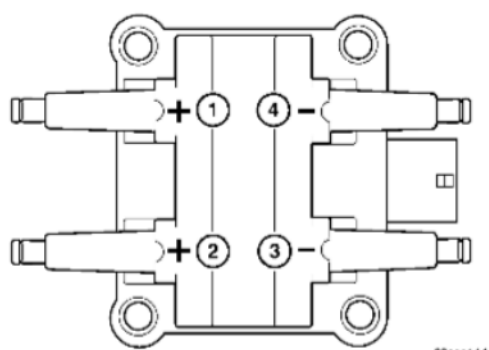

80cee*44

IGNITION COIL - 2.4L

IGNITION COIL RESISTANCE - 4.0L ENGINE

PRIMARY RESISTANCE 21-27°C (70-80°F)
0.71 - 0.88 Ohms

SPARK PLUGS

ENGINE	PLUG TYPE	ELECTRODE GAP
2.4L 4-Cylinder	RE16MC (Champion #)	0.94 to 1.09 mm (0.037 to 0.042 in.)
4.0L 6-Cylinder	ZFR5N (NGK #)	0.77 mm - 0.90 mm (0.030 in. - 0.035 in.)

SPARK PLUG CABLE RESISTANCE

MINIMUM	MAXIMUM
250 Ohms Per Inch	1000 Ohms Per Inch
3000 Ohms Per Foot	10,000 Ohms Per Foot